


Synthetic Mechanical Packing

AP STYLE 1531

**CURTISS -
WRIGHT**

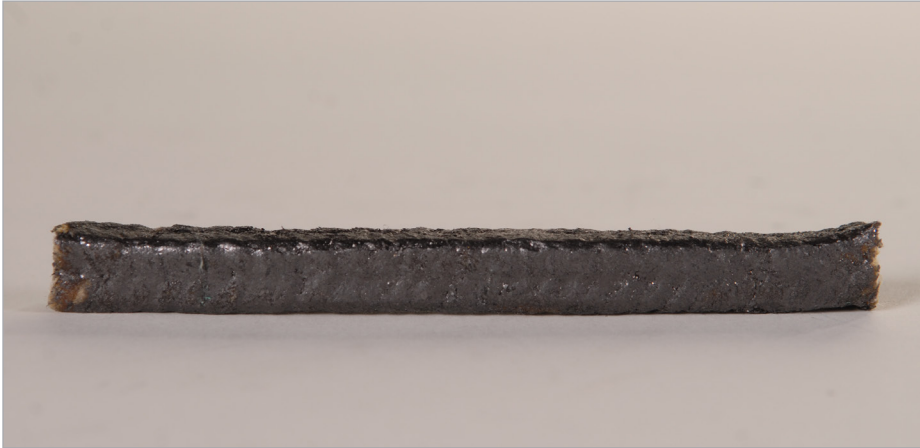

AP Style 1531

Style 1531 is manufactured from a non-asbestos, synthetic high temperature yarn. The finished braid is impregnated with a proprietary lubricant and coated with graphite.

Style 1531 is excellent general service packing for centrifugal and rotary pumps, handling hot and cold water, oil, gases, non-abrasives, and weak acids. Style 1531 is available as individual rings, combination sets, and in bulk.

Typical Properties

Maximum Temperature
500 °F
Maximum Shaft Speed
1,500 FPM
pH Range
4-10
Construction
Square Braid

Standard Sizes

in.	1/8	3/16	1/4	5/16	3/8	7/16	1/2	9/16	5/8	3/4	7/8	1
ft./lb.	128	56	34	22	16	12.5	9	6	5.5	4	2.6	2.2

CONTACT INFORMATION:

18001 Sheldon Road, Middleburg Hts., OH 44130
+1.216.267.3200 | cwnuclear.com