
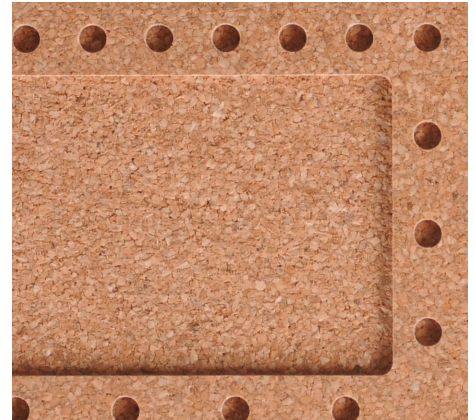


# Fiber Gasket Products

AP STYLE 440

**CURTISS -  
WRIGHT**

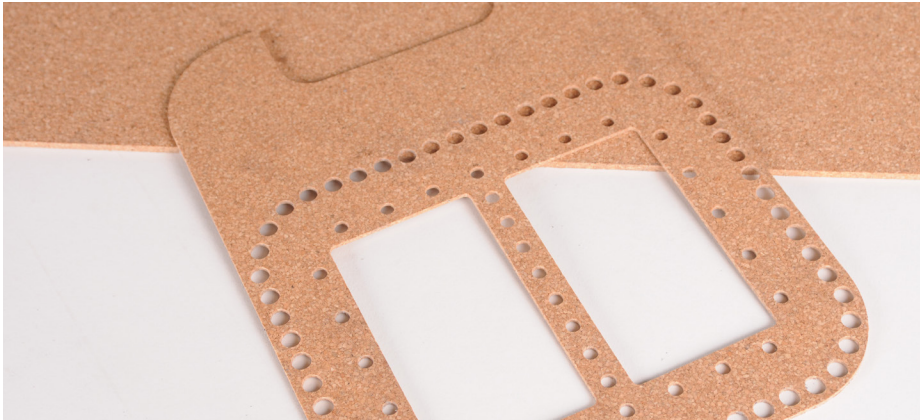

## AP Style 440

Style 440 is a combination of medium size cork particles and glue glycerin. It is an excellent medium compression composition cork that is fungus resistant. Cork works well on oils and gasoline, and is good for gaskets requiring low to medium torque loads such as fluid seals, gear boxes, oil seals, and valve covers.

Style 440 is available in sheets, bulk rolls (special order), and pre-cut gaskets.

## Typical Properties

<b>Maximum Temperature</b>
-40 °F to +225 °F
<b>Density</b>
17 lb./cu.ft.
<b>Tensile</b>
100 psi
<b>Compression</b>
25–40% @ 100 psi
<b>Recovery</b>
75% min
<b>ASTM Callout</b>
ASTM F104 F219000 HH-C-576b, Type II, CL2
<b>Thickness</b>
1/32", 1/16", 3/32", 1/8", 3/16", 1/4", 3/8"
<b>Sheet Sizes</b>
28" x 50" width

## CONTACT INFORMATION:

18001 Sheldon Road, Middleburg Hts., OH 44130  
+1.216.267.3200 | [cwnuclear.com](http://cwnuclear.com)