


Rubber Gasket Products

AP STYLE 449

**CURTISS -
WRIGHT**

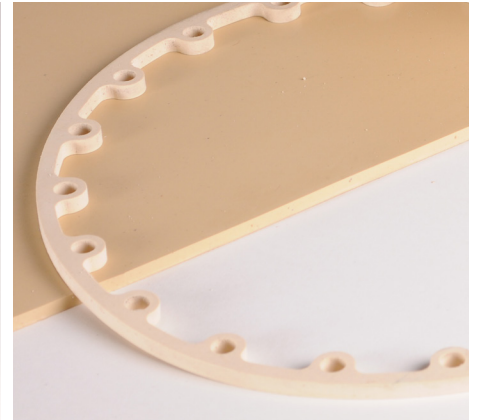

AP Style 449

AP Services, a product and service brand of Curtiss-Wright, has state-of-the-art gasket manufacturing technology using CNC driven water jet cutters. Style 449 Pure Gum Rubber is a full floating natural rubber. Style 449 is manufactured from pure Gum Rubber to form a smooth resilient sheet.

Gum Rubber has superior resilience, tensile, elongation, and abrasion resistance properties. It has excellent tear strength, is resistant to water, most salts, mild acids, and many other chemicals, and is non-marking and non-toxic.

Examples of conditions where the use of Gum Rubber should be avoided are: environments involving ozone, strong acids, animal fats, oils, greases, and most hydrocarbons.

Style 449 is available in sheets, bulk rolls, and pre-cut gaskets.

This material can be manufactured in numerous different compounds and durometer ratings. Please call with your specific requirements.

Typical Properties

Temperature Range
-40 °F to +140 °F
Durometer
40 (+/-5) Shore A
Weight
1/8" 6 lb./sq.
ASTM Callout
D 2000
Thickness
1/16", 3/32", 1/8", 3/16", 1/4", 3/8", 1/2" (other thicknesses available upon request)
Sheet Sizes
36" and 48" width

CONTACT INFORMATION:

18001 Sheldon Road, Middleburg Hts., OH 44130
+1.216.267.3200 | cwnuclear.com