


Rubber Gasket Products

AP STYLE 461CI

**CURTISS -
WRIGHT**

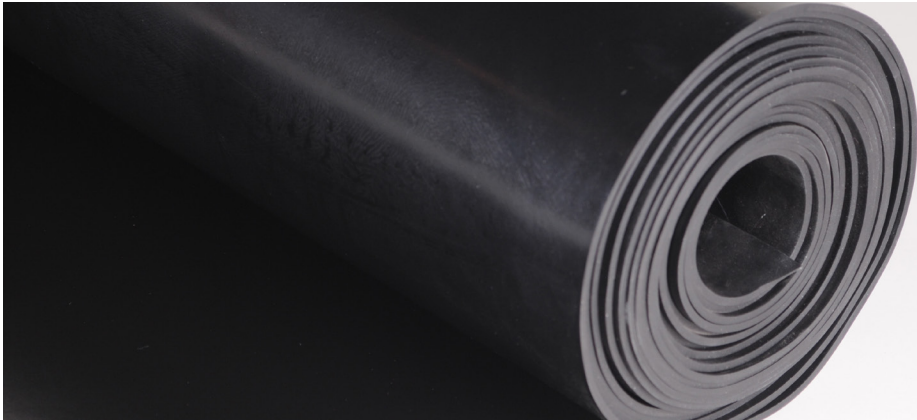

AP Style 461CI

AP Services, a product and service brand of Curtiss-Wright, has state-of-the-art gasket manufacturing technology using CNC driven water jet cutters. Style 461 is an SBR compound rubber reinforced with a close weave polyester fabric. This construction included one ply of fabric for each 1/16" thickness. Cloth reinforcement enhances dimensional stability in flanged gasket applications with high compression loads. Style 461 is a smooth plate finish sheet manufactured from a SBR based Compound.

Cloth Inserted SBR rubbers are good for use in air, hot water, saturated steam, low pressure steam, and hydraulic applications. Avoid using this sheet in oil applications, as it has no oil resistance.

Style 461 is available in sheets, bulk rolls, and pre-cut gaskets.

This material can be manufactured in numerous different compounds and durometer ratings. Please call with your specific requirements.

Typical Properties

Temperature Range
-20 °F to +170 °F
Durometer
70 (+/-5) Shore A
Weight
1/8" 10 lb./sy.
Thickness
1/16", 3/32", 1/8", 3/16", 1/4"
Sheet Sizes
36", 48", and 72" width

CONTACT INFORMATION:

18001 Sheldon Road, Middleburg Hts., OH 44130
+1.216.267.3200 | cwnuclear.com